



# PRODUCT MANUAL

etherCON® Mini RJ45 Carrier | NE8MRC

## 1 PRODUCT EXAMPLE



### NE8MRC

The product is a rugged RJ45 carrier cable connector for indoor use.

## 2 GENERAL

The NE8MRC is engineered to enhance the mechanical integrity of standard RJ45 connector assemblies, providing reinforced protection against strain and impact.

Please note that the RJ45 carrier cable connector does not include an RJ45 plug. It is designed for use with non pre-assembled cables only.

## A TECHNICAL DATA

### Product

Title	NE8MRC
Product family	etherCON® Mini
Connection type	RJ45 carrier cable connector
Gender	male
IMPORTANT	Cable connectors do not include RJ45 plug. RJ45 cable assembly must be provided by end user!

### Mechanical

Cable O.D.	5.5 - 8.0 mm
Lifetime	min. 1'000 mating cycles

### Material

Strain relief	Polyketon (PK)
Sleeve	Polyamid (PA6, Gf15%)

### Environmental

Protection class	IP20 (mated)
Temperature range	-30 °C to +70 °C




Read the operating instructions carefully, and observe the safety instructions in particular.

If you do not follow the safety instructions and the information on proper handling in this operating manual, we accept no liability for any resulting personal injury or damage to property.

In addition, the warranty/guarantee will become void in such cases.


### 3 ASSEMBLY INSTRUCTION

#### Step 1 ASSEMBLE THE CHUCK

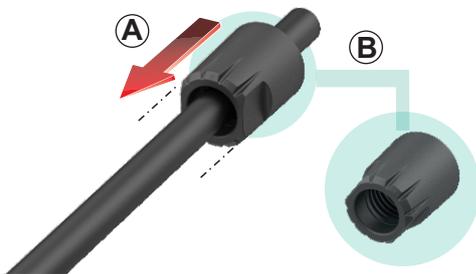


- Ⓐ Slide the clamping sleeve over the cable.
- Ⓑ Make sure the clamping sleeve is in the correct position. See picture.

#### Step 2 ASSEMBLE RJ45 PLUG

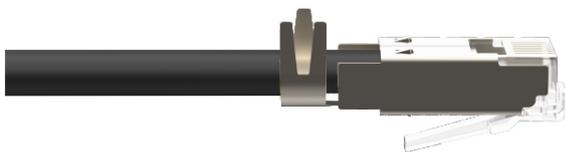


Assemble the RJ45 Plug.

#### Step 5 ASSEMBLE CHUCK

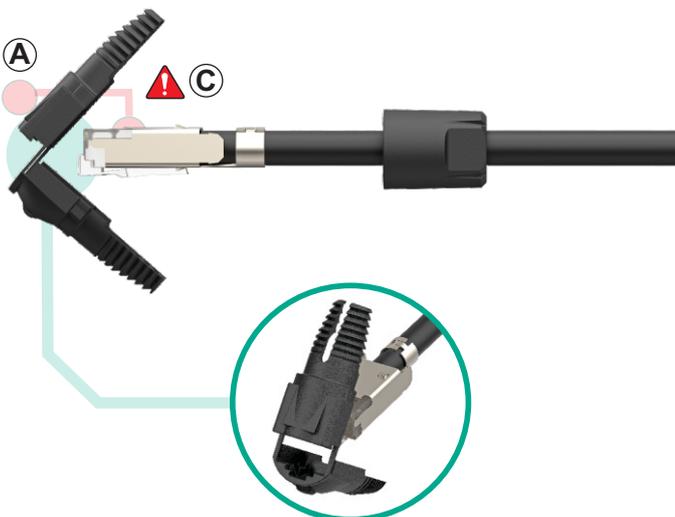

Position the chuck onto the RJ45.

- Ⓐ Open the chuck.
- Ⓑ Slide the RJ45 through the chuck on the right position.
- Ⓒ **Attention:**  
The position of the latch of the RJ45 must match the position of the chuck.

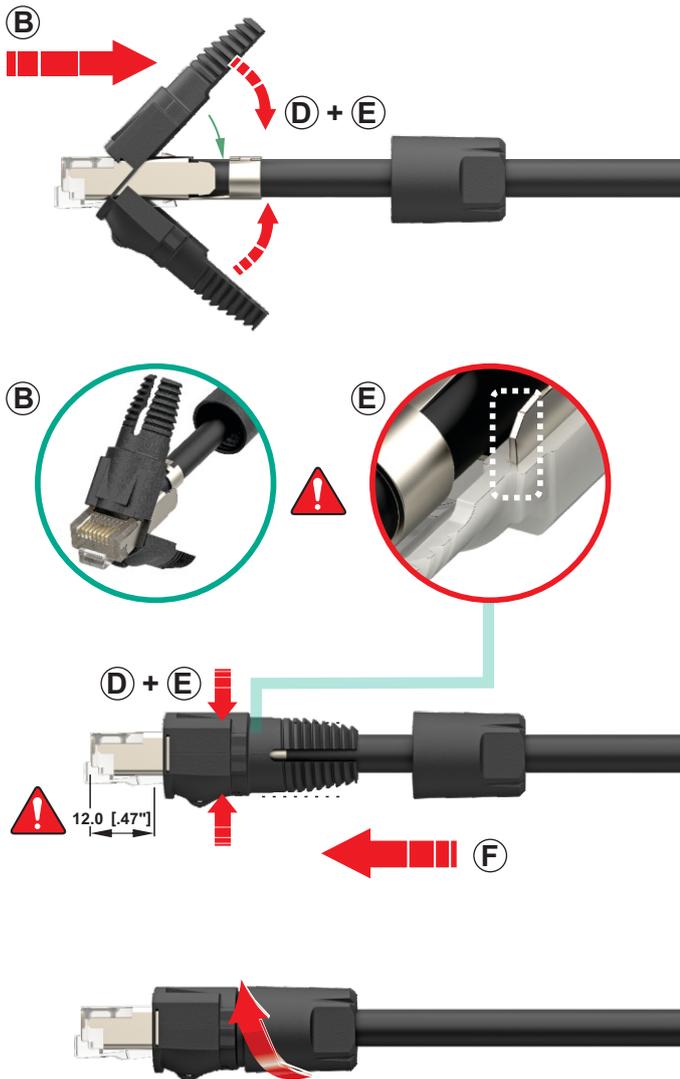

Ⓓ Fold the chuck together and hold it in position for the next step.

Ⓔ **Attention:**  
Make sure that the thread of the chuck is aligned correctly.

Ⓕ Slide the sleeve onto the chuck thread and tighten it.

- Recommended distance min. 12.0 mm (0.47").
- Tip: Plug the RJ45 into a chassis during assembly.



Example:  
etherCON  
Chassis  
Connector



## 4 Application and Safety Instructions

### A Assembly

- Ensure the use of appropriate personal protective equipment during the assembly and processing of the product.
- Neutrik components must only be assembled with designated and specified parts.
- Replacement parts are suitable only when used in combination with the designated components.
- The product's characteristics are guaranteed only in the intended combination.
- The assembling party is responsible for ensuring proper assembly in compliance with local regulations.
- Assembly must be carried out by professionals.
- Suitable personal protective equipment must be used during assembly and further processing of the product.
- The safety evaluation of this product was conducted according to standard requirements under laboratory conditions.
- Product safety in the intended application must be ensured by the respective involved party after assembly to a cable or installation in an electronic device or similar.



## B Application

- The product is exclusively intended for installation in electronic equipment or similar devices.
- The product is not intended for use in medical applications.
- The product is not intended for use in potentially explosive or flammable environments.

## B Application

- The product is exclusively intended for installation in electronic equipment or similar devices.
- The product is not intended for use in medical applications.
- The product is not intended for use in potentially explosive or flammable environments.

## C Operation

- Before plugging in, check the contact area for dry surfaces.
- Product surfaces may cause burns at elevated ambient temperatures. Ensure the use of appropriate protective equipment.
- Neutrik products and components should only be combined with designated Neutrik Group brands and components.
- If visible damage is present, the product should be checked for suitability.
- When using with other products, suitability and safety must be assessed before commissioning and appropriate safety measures taken if necessary.
- Children must be supervised to ensure they do not play with the product.

## D Cleaning

- Clean only with dry and lint-free materials or compressed air.
- The product must not be cleaned while under load. It may only be cleaned when it is not connected to any voltage and without the use of cleaning agents.

## E Damages

- Handle products with care.
- In case of visible damages, check the suitability of the product for use.
- The product must be protected from mechanical impacts. Avoiding mechanical influences is the responsibility of the operating party.

## F DISPOSAL



Electronic devices are recyclable materials and do not belong in household waste. Dispose of the product at the end of its service life in accordance with the applicable legal regulations.

## 5 More Information on the website

Find more details of opticalCON on [www.neutrik.com](http://www.neutrik.com).  
<https://www.neutrik.com/en/neutrik/products/ethercon-r-rj45-connectors/ethercon-r-cable-connectors>

