



HANDLING INSTRUCTION

opticalCON® DUO LITE | Fiber Optic Connection System



CAUTION: Laser radiation, do not stare into beam!

Do not disassemble the opticalCON DUO LITE cable connector if not necessary.

The automatic sealing shutter of the opticalCON avoids pollution of the inside located LC-connectors.

The dust proof design reduces cleaning to a minimum, if nevertheless necessary be aware that improper cleaning can cause damage to the equipment.

A. Cable Connector Cleaning

- Tools:**
- 99% isopropyl alcohol (IPA) or cleaning fluid (FOCD-CF)
 - Lint free wipes (FOCD-DW)

The primary concern with using IPA is that it be removed completely from the LC connector.

If the alcohol is allowed to evaporate slowly of the ferrule, it can leave residual material on the fiber core or cladding.




1. Disconnect both cable ends for safety reasons
Invisible laser radiation may be emitted from disconnected fibers or connectors. Do not stare into beams or view directly with optical instruments.
2. Untight the connector bushing and remove carefully the insert of the connector housing.
3. Inspect the LC connectors with a fiberscope (CAS-FOCD)
4. Fold a lint-free wipe FOCD-DW into a square.
5. Moisten one section of the wipe with one drop of the alcohol. Be sure that a portion of the wipe remains dry.
6. Wipe lightly the ferrule tip in the alcohol moistened portion of the wipe.
Immediately repeat this wiping action on the dry section of the wipe to remove any residual alcohol.
Do not scrub the fiber against the wipe, doing so can cause scratches.
7. Dispose the wipe, NEVER REUSE A WIPE.
8. Inspect the connector again with a fiberscope (CAS-FOCD).
9. Repeat the process if necessary.
10. After the cleaning procedure slide the connector insert back into the connector housing.
Align the key on the insert to the cutout of the metal housing.
11. Screw both connector parts tight together.



B. Chassis Connector Maintenance

2.1

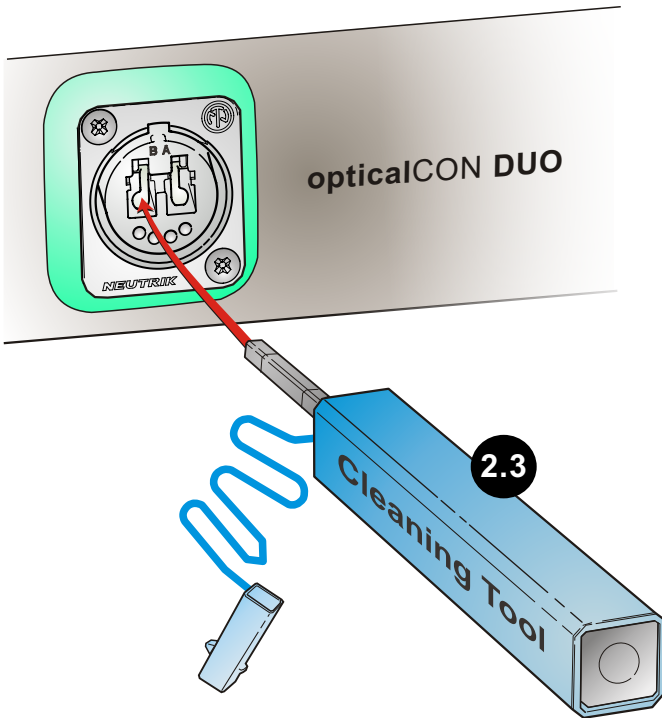


1. Wet cleaning using lint-free wipes

Remove LC connectors at the rear of the opticalCON chassis and follow the instructions A. 3 to 9.

2. Dry cleaning using FOCD-DC125

- 2.1 Remove Dust cap. Insert the stick of the cleaning device.
- 2.2 Make sure that the insertion position is on the bottom of the LC connector hole in order to hit the sealing shutter release bar.
- 2.3 Push the outer shell to start cleaning the LC connector end face.
A "pop" sound indicates end of cleaning process.
- 2.4 Remove the cleaning device and put dust cap over the stick.

2.2

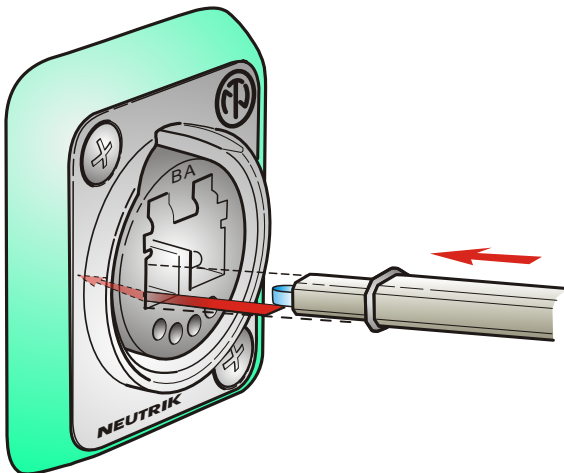

NEUTRIK AG
NEUTRIK USA Inc.
NEUTRIK (UK) Ltd.
NEUTRIK Vertriebs GmbH
NEUTRIK France
NEUTRIK Tokyo Ltd.
NEUTRIK Hong Kong Ltd.
NEUTRIK India Pvt. Ltd.

LI
USA
UK
DE/NL/AT/DK
FR
JP
HK
IND

T: +423/237 24 24
T: +1 704/972 3050
T: +44 1983/811 441
T: +49 8131/280 890
T: +33 1/4131 6750
T: +81 3/3663 4733
T: +852/2687 6055
T: +91/982 05 43 424

F: +423/232 53 93
F: +1 704/438 9202
F: +44 1983/811 439
F: +49 8131/280 830
F: +33 1/4131 0511
F: +81 3/3663 4796
F: +852/2687 6052
F: +91/22 26163 540

